



Cold-water pressure washer for daily commercial use. With its compact dimensions, robust construction and greatest possible manoeuvrability, this unit is a credit to the compact class.



1 - 2 h



EASY PRESS



AVS



AUTO SHUTDOWN

1 Easy Press spray gun

- Ergonomic design for convenient operation.
- Reduced operation and holding effort for easy operation.

2 Infinitely variable pressure and water flow regulation

- Adjustable directly on the machine.
- For gentle cleaning of sensitive surfaces.

3 Extendable push handle

- Large aluminium profiles ensure stability and easy turning manoeuvre.
- Acts as an accessory holder when extended.

4 Outstanding mobility

- For fast cleaning at different locations of use.
- Space-saving storage in service vehicles.



HD 6/15 CX Plus

- Three-piston axial pump with ceramic pistons
- Easy Press spray gun with soft grip handle
- Continuous pressure regulation

Technical data

Order no.	1.150-650.0	
EAN code	4039784717473	
Supply voltage	Ph / V / Hz	1 / 230 / 50
Flow rate	l/h	230-560
Working pressure	bar / MPa	30-150 / 3-15
Max. pressure	bar / MPa	190 / 19
Max. water inlet temperature	°C	60
Connection load	kW	3.1
Weight	kg	28
Dimensions (L × W × H)	mm	360 × 400 × 925

Equipment

Spray gun	Easy Press trigger gun	
Trigger gun with soft grip insert	■	
Pressure hose	m	15 / Premium quality
Spray lance	mm	850
Triple nozzle (0°/25°/40°)	manual	
Dirt blaster	■	
Integrated HP hose reel	■	
Anti-twist system	■	
Pressure cut-off	■	
Servo Control	-	

■ Included in delivery.

Accessories for HD 6/15 CX Plus

1.150-650.0

KÄRCHER



	Order no.	ID	Max. working pressure	Length	Price	Description	
Standard with unions on both sides							
High-pressure hose, 15 m, ID 8, 315 bar, including rotary coupling	1	6.390-010.0	ID 8	315 bar	15 m		▲
High-pressure hose, 20 m, ID 8, 315 bar, extension piece	2	6.390-031.0	ID 8	315 bar	20 m		▲
High-pressure hose, 15 m, ID 10, 220 bar, extension piece	3	6.390-023.0	ID 10	220 bar	15 m		▲
High-pressure hose, 10 m, ID 8, 315 bar, extension piece	4	6.391-342.0	ID 8	315 bar	10 m		▲
High-pressure hose, 30 m, ID 8, including rotary coupling	5	6.390-293.0	ID 8	315 bar	30 m		▲
Longlife 400 with unions on both sides							
High-pressure hose Longlife 400, 10 m, ID 8, including rotary coupling	6	6.388-083.0	ID 8	400 bar	10 m	10 m high-pressure hose Longlife 400 (DN 8) with rotary coupling, two layer high-strength steel wire reinforced. Connectors at both ends. M 22 x 1.5, with kink protection.	▲
High-pressure hose Longlife 400, 20 m, ID 8, extension	7	6.390-027.0	ID 8	400 bar	20 m	with rotary coupling, 2 x M 22 x 1.5	▲
High-pressure hose Longlife 400, 10 m, ID 6, 10 m, including rotary coupling	8	6.391-883.0	ID 6	400 bar	10 m	With rotary coupling, 2 x M 22 x 1,5	▲
Longlife 400 high-pressure hose, 10 m, DN 8, extension piece	9	6.391-354.0	ID 8	400 bar	10 m		▲
High-pressure hose Longlife 400, 15 m, ID 8, including rotary coupling	10	6.389-709.0	ID 8	400 bar	15 m	With rotary coupling, 2 x M 22 x 1.5	▲
High-pressure hose Longlife 400, 30 m, ID 8, including rotary coupling	11	6.390-294.0	ID 8	400 bar	30 m		▲
High-pressure hose 1.5 m, ID 8, including connectors	12	6.390-178.0	ID 8	400 bar	1.5 m	1.5 m high-pressure hose (DN 8, M 22 x 1.5) with kink protection and connectors at both ends. For connecting to hose reels with appropriate connector (M 22 x 1.5).	□
Food industry version with unions on both sides							
High-pressure hose, 10 m, DN 8, suitable for the food industry, extension piece	13	6.389-479.0	ID 8	250 bar	10 m	10 m high-pressure hose (DN 8) with patented (rotating) AVS trigger gun connector. Non-discolouring outer layer for use in the food industry. M 22 x 1.5 with anti-kink sleeve.	▲
High-pressure hose, 20 m, ID 8, suitable for food industry, extension piece	14	6.389-581.0	ID 8	250 bar	20 m	20 m high-pressure hose (DN 8) with swivel coupling. Non-discolouring outer layer for use in the food industry. Connectors at both ends, M 22 x 1.5, with kink protection. NW 8/155°C/250 bar.	▲
Longlife food design with screw connections at both ends							
High pressure hose food ID 8, 10 m	15	6.391-864.0	ID 8	400 bar	10 m	Longlife HP hose for use in the food industry. Außendecke##	▲
High-pressure hose food industry 400 bar, 20 m, ID 8, including rotary coupling	16	6.391-887.0	ID 8	400 bar	20 m	animal-grease-resistant, non-colour-bleeding material. With rotary coupling, 2 x M 22 x 1,5	▲
Standard with male coupling on both sides							
High-pressure hose ID 6, 15 m, for hose reel	17	6.391-417.0	ID 6	250 bar	15 m	15 m high-pressure hose with patented (rotating) AVS trigger gun connector and nipple connector for hose reel.	■
Standard							
High-pressure hose, 10 m, ID 8, AVS trigger gun connector	18	6.390-025.0	ID 8	315 bar	10 m	10 m high-pressure hose (M 22 x 1.5) with kink protection. With patented rotating AVS trigger gun connector and manual coupling. Further data: DN 8/155°C/315 bar.	□
High-pressure hose, 15 m, ID 8, AVS trigger gun connector	19	6.390-185.0	ID 8	315 bar	15 m	15 m high-pressure hose (M 22 x 1.5) with kink protection. With patented rotating AVS trigger gun connector and manual coupling. Further data: DN 8/155°C/315 bar.	□

■ Included in delivery. □ Available accessories. ▲ Extension hose.

Accessories for HD 6/15 CX Plus 1.150-650.0



		Order no.	ID	Max. working pressure	Length	Price	Description	
High-pressure hose, 20 m, ID 8, AVS trigger gun connector	20	6.390-171.0	ID 8	315 bar	20 m		20 m high-pressure hose (M 22 x 1.5) with kink protection. With patented rotating AVS trigger gun connector and manual coupling. Further data: DN 8/155°C/315 bar.	<input type="checkbox"/>
High-pressure hose, 10 m, ID 6, 300 bar, AVS trigger gun connection	21	6.391-875.0	ID 6	300 bar	10 m		With patented AVS connection in the trigger gun (pivot-mounted) and hand screw union. M 22 x 1.5 with anti-kink protection. NW 6/155°C/300 bar	<input type="checkbox"/>
Longlife 400								
Longlife 400 high-pressure hose, 10 m, DN 6, M 22 x 1.5	22	6.391-882.0	ID 6	400 bar	10 m		With patented AVS connection in the trigger gun (pivot-mounted).	<input type="checkbox"/>
Longlife 400 high-pressure hose, 10 m, DN 8,	23	6.391-351.0	ID 8	400 bar	10 m			<input type="checkbox"/>
Food industry version								
High-pressure hose, 15 m, ID 6, AVS trigger gun connector 11 mm, suitable for food industry, grey	24	6.391-654.0	ID 6	250 bar	15 m		15 m high-pressure hose (DN 6) with patented (rotating) AVS trigger gun connector. Non-discolouring outer layer for use in the food industry. DN 6/155°C/250 bar.	<input type="checkbox"/>
Longlife food design								
High-pressure hose Longlife 400, 15 m, ID 6, AVS trigger gun connection	25	6.391-888.0	ID 6	400 bar	15 m		Longlife HP hose for use in the food industry. Außendecke## animal-grease-resistant, non-colour-bleeding material. With patented AVS connection in the pistol (pivot mounted)	<input type="checkbox"/>
Special hoses								
High-pressure hose 1.5 m, ID 8, including connectors, outlet bend	26	6.388-886.0	ID 8	400 bar	1.5 m			<input type="checkbox"/>

■ Included in delivery. □ Available accessories. ▲ Extension hose.

Accessories for HD 6/15 CX Plus 1.150-650.0



		Order no.	Flow rate				Price	Description	
Easy Press high-pressure trigger gun with holding force reduction (Kärcher patent)									
Easy Press HP trigger gun with soft grip	1	4.775-463.0						Easy press high-pressure trigger gun with softgrip. For high-pressure hoses DN 6 and DN 8 with 11 mm swivel diameter.	■
Trigger guns									
High-end HP trigger gun	2	4.775-823.0							□
Quick connect									
Quick coupling	3	6.401-458.0						For quick change of different spray lances and accessories. Optimum adaption to Kärcher accessories, especially for connection between trigger gun and spray lance. With M22 x 1,5 female.	□
Male coupling	4	6.401-459.0						Hardened stainless steel nipple for quick coupling 6.401-458. With M22 x 1,5 male.	□

■ Included in delivery. □ Available accessories. ▲ Extension hose.

Accessories for HD 6/15 CX Plus 1.150-650.0



		Order no.	Max. working pressure	Nozzle size			Price	Description	
Triple nozzles									
Triple nozzle 034	1	4.767-147.0	300 bar	34				Triple nozzle with manual nozzle changeover. Convenient spray adjustment. For high-pressure cleaners with injector; low-pressure fan jet for detergent removal and application. Connector M 18x1.5.	■
Dirt Blaster, small									
Dirt blaster - more Performance	2	4.767-230.0	180 bar	35				The new performance dirt blaster (nozzle size 035) with rotating point jet makes a big difference: up to 50% higher cleaning and area performance than its predecessor.	■
Dirt blaster	3	4.767-022.0	180 bar	35				Small rotary nozzle for dirt blaster. The rotating point jet achieves 10 times the cleaning performance. Outstanding working time thanks to ceramic nozzle and bearing ring. Max. 180 bar/18 MPa, 60°C.	□
Triple nozzle, touchless changeover									
Triple nozzle, touchless changeover	4	4.767-001.0		34				Triple nozzle with high-pressure pencil jet (25°) and low-pressure fan jet (40°). Fast and easy jet changeover by turning the nozzle.	□
Dirt blaster, large									
Dirt blaster	5	4.763-931.0	300 bar	35				The dirt blaster with rotating pencil jet offers 10 times better cleaning performance. Ceramic nozzle and bearing ring for a long service life. Further data: Max. 300 bar, 30 MPa, 85°C.	□

■ Included in delivery. □ Available accessories. ▲ Extension hose.

Accessories for HD 6/15 CX Plus 1.150-650.0

KÄRCHER



		Order no.	Max. working pressure	Length		Price	Description	
Rotating spray lances								
850 mm spray pipe, rotatable	1	4.760-663.0	300 bar	850 mm			850 mm stainless steel lance (manual coupling) with ergonomic handle for ease of use and protection. Rotatable 360° under pressure.	■
600 mm spray pipe, rotatable	2	4.760-664.0	300 bar	600 mm			600 mm stainless steel lance (manual coupling) with ergonomic handle for ease of use and protection. Rotatable 360° under pressure.	□
1050 mm spray pipe, rotatable	3	4.760-660.0	300 bar	1050 mm			1050 mm stainless steel lance (manual coupling) with ergonomic handle for ease of use and protection. Rotatable 360° under pressure.	□
1550 mm spray pipe, rotatable	4	4.760-661.0	300 bar	1550 mm			1550 mm stainless steel lance (manual coupling) with ergonomic handle for ease of use and protection. Rotatable 360° under pressure.	□
2050 mm spray pipe, rotatable	5	4.760-662.0	300 bar	2050 mm			2050 mm stainless steel lance (manual coupling) with ergonomic handle for ease of use and protection. Rotatable 360° under pressure.	□
Variable pressure spray lance								
Variable pressure spray lance	6	4.760-362.0		670 mm			670 mm variable pressure lance with integrated pressure gauge. Variable pressure adjustment on the handle. Nozzle connector: M 24 x 1.5. Low pressure detergent application.	□
Variable pressure lance	7	4.760-230.0		1040 mm			1040 mm pressure adjustable lance with integrated pressure gauge. Variable pressure adjustment on the handle. Nozzle connector: M 24 x 1.5. Low pressure detergent application.	□
Adapter for variable pressure spray lance								
Adapter for variable pressure lance	8	4.762-075.0					For items 4.760-230 and 4.760-362 for mounting accessories to lance, M 24/18 x 1.5	□
Angular spray lance								
Spray lance for toilets and rain gutters	9	4.760-073.0					Stainless steel lance WC and gutter with nozzle insert. Specially shaped for effective and hygienic cleaning of gutters and toilets.	□
Undercarriage spray lance								
Underbody lance	10	4.760-245.0		700 mm			Stainless steel lance for effective and easy underbody and wheel arch cleaning. Without high-pressure nozzle.	□
Spray lances								
Vibrasoft lance	11	6.415-951.0	250 bar	950 mm			The spring-loaded 360° loop handle significantly reduces the vibrations on the spray lance, reducing the physical burden on the user, e.g. when working with the dirt blaster.	□
Spray lance								
250 mm lance, non-rotatable	12	4.760-667.0		250 mm			250 mm stainless steel lance. With manual coupling. Non-rotatable.	□
Double lance								
Double lance 960 mm	13	6.394-665.0	310 bar	960 mm			960 mm double lance for variable pressure adjustment on handle at full water flow rate. Suitable for agricultural use (e.g. stable cleaning).	□
Flexible spray lance								
Flexible lance 1050 mm	14	6.394-654.0	210 bar	1050 mm			1050 mm flexible lance with variable bend from 20° to 140°, ideal for cleaning difficult to reach areas, e.g. gutters.	□
Telescopic spray lance								
Telescopic spray lance	15	6.394-690.0	225 bar					□
Strap for telescopic spray pipe	16	6.373-987.0					Convenient strap for relief when working with the telescopic spray lance (6.394-690). The burden is optimally distributed on the body and longer periods of use are possible.	□

■ Included in delivery. □ Available accessories. ▲ Extension hose.

Accessories for HD 6/15 CX Plus

1.150-650.0



17

		Order no.	Max. working pressure	Length		Price	Description
Gutter cleaner							
Gutter cleaning lance	17	2.642-305.0					The lance is suited for cleaning of gutter systems. Because of the shape of the lance and the special nozzle the gutter can be cleaned without removing the cover plates. <input type="checkbox"/>

■ Included in delivery. □ Available accessories. ▲ Extension hose.

Accessories for HD 6/15 CX Plus 1.150-650.0



		Order no.		Dummy	Dummy	Dummy	Price	Description	
Miscellaneous									
Backflow check valve	1	6.412-578.0	-					To prevent cleaning agent from entering the drinking water system at low supply pressure.	<input type="checkbox"/>

■ Included in delivery. □ Available accessories. ▲ Extension hose.

Accessories for HD 6/15 CX Plus 1.150-650.0

KÄRCHER



		Order no.	Flow rate	Nozzle size	Diameter	Price	Description	
FR Classic surface cleaner								
FR Classic surface cleaner	1	2.643-476.0					The ideal entry-level model in the Kärcher surface cleaner range for cleaning surfaces indoors and outdoors. With splash guard and up to 150 bar working pressure.	<input type="checkbox"/>
Hard surface cleaner FR 30								
FR 30	2	2.642-997.0			300 mm			<input type="checkbox"/>
FR 30 Me surface cleaner								
Hard surface cleaner FR 30 Me	3	2.640-355.0			300 mm		Hot water resistant stainless steel surface cleaner with double ceramic bearings, non-marking swivel castors and suction hose connection. Ideal for indoor cleaning, e.g. food industry.	<input type="checkbox"/>
Machine-specific nozzle kits for FR								
Nozzle kit for surface cleaners	4	2.640-401.0	500–650 l/h				Nozzle kit includes power nozzles and unions. For Kärcher surface cleaners (500 to 650 l/h).	<input type="checkbox"/>
Machine-specific nozzle kits for FR Classic								
Nozzle kit for FR Classic 034	5	2.885-313.0		34			Nozzle kit specifically for FR Classic surface cleaner.	<input type="checkbox"/>
Hard surface cleaner FRV 30								
FRV 30 surface cleaner	6	2.642-999.0						<input type="checkbox"/>
Rubber lip for FRV 30	7	2.642-910.0					For smooth floors indoors. The squeegee increases the suction performance of the FRV 30 and minimises the amount of water remaining. This means the floor is dry in just a few minutes.	<input type="checkbox"/>
Extension hose 5 m	8	4.440-939.0					5m extension hose for FRV 30. Connection sleeve included.	<input type="checkbox"/>
ABS hose fastening	9	2.642-528.0						<input type="checkbox"/>
ABS dirt trap	10	2.642-532.0						<input type="checkbox"/>
Machine-specific nozzle kits for FRV								
Nozzle kit 035 – for FRV 30	11	2.642-430.0		35				<input type="checkbox"/>
Nozzle kit 040 – for FRV 30	12	2.642-431.0		40				<input type="checkbox"/>
Nozzle kit 045 – for FRV 30	13	2.642-432.0		45				<input type="checkbox"/>
Nozzle kit 050 – for FRV 30	14	2.642-433.0		50				<input type="checkbox"/>
Nozzle kit 080 – for FRV 30	15	2.642-982.0		80				<input type="checkbox"/>
FRV 30 Me surface cleaner								
FRV 30 Me	16	2.642-911.0						<input type="checkbox"/>
FRV 30 Me extension hose	17	4.441-040.0						<input type="checkbox"/>

■ Included in delivery. □ Available accessories. ▲ Extension hose.

Accessories for HD 6/15 CX Plus 1.150-650.0



		Order no.	Nozzle size				Price	Description	
Power nozzle spray angle 25°									
Power nozzle spray angle 25°	1	2.883-803.0	34					Fan jet nozzle with 25° spray angle, suitable for large areas and removing stubborn dirt and stains.	<input type="checkbox"/>
25° power nozzle for cleaning agent suction	2	2.884-521.0	250						<input type="checkbox"/>

■ Included in delivery. □ Available accessories. ▲ Extension hose.


Accessories for HD 6/15 CX Plus 1.150-650.0



		Order no.	Nozzle size				Price	Description	
Wet blasting attachment (without nozzle)									
Wet blasting attachment with flow control (without nozzles)	1	4.762-010.0						Paint, rust and scale removal made easy: Kärcher wet blasting attachment with flow control for adding blasting abrasive to the high-pressure jet.	<input type="checkbox"/>
Wet blasting attachment without flow control (nozzles not included)	2	4.762-022.0						Paint, rust and scale removal made easy: Kärcher wet blasting attachment with flow control for adding blasting abrasive to the high-pressure jet. Without flow control.	<input type="checkbox"/>
Nozzle kits for wet jet unit									
Nozzle kit for wet jet unit 035	3	2.638-526.0	35					Nozzle kit with wet blasting nozzle and nozzle insert (type specific). For optimal Kärcher wet blasting attachment performance. Only in combination with wet blasting attachment 4.762-010/-022.	<input type="checkbox"/>
Boron carbide nozzle									
Boron carbide nozzle, for machines up to 1,000 l/h	4	6.415-084.0	6 mm					In addition to nozzle packs. Very wear-resistant nozzle with boron carbide chuck for continuous-duty operation.	<input type="checkbox"/>

■ Included in delivery. □ Available accessories. ▲ Extension hose.

Accessories for HD 6/15 CX Plus 1.150-650.0

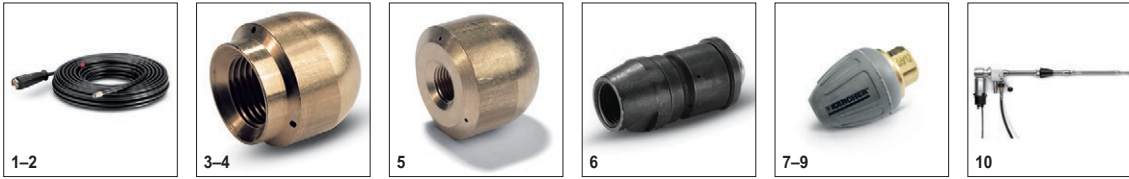

		Order no.	Max. working pressure	Nozzle size	Diameter	Price	Description	
Pipe cleaning hose, ID 6								
Pipe cleaning hose, DN 6, 20 m, max. 120 bar	1	6.390-028.0	120 bar				The 20 m pipe cleaning hose is a highly flexible high pressure hose for pipe interior cleaning (threaded connection for nozzle R 1/8).	<input type="checkbox"/>
Pipe cleaning hose, DN 6, 30 m, max. 120 bar	2	6.390-029.0	120 bar				30 m flexible high-pressure hose (DN 6) for cleaning pipes (threaded connection for R 1/8 nozzle).	<input type="checkbox"/>
Pipe cleaning nozzle								
Pipe cleaning nozzle	3	5.763-015.0		55	16 mm		16 mm pipe cleaning nozzle with internal thread. Various jet directions for environmentally-friendly cleaning of blocked drains and pipes.	<input type="checkbox"/>
	4	5.763-016.0		60	16 mm			<input type="checkbox"/>
	5	5.763-017.0		50	30 mm		Pipe cleaning nozzle with inner thread. Different spray directions. The hose moves freely through the pipe. (R 1/8" connection, 3 x 30° backwards, diameter 30 mm.)	<input type="checkbox"/>
Rotating pipe cleaning nozzle	6	6.415-428.0		50	16 mm		Pipe cleaning nozzle with four rotating jets and inner thread. Different spray directions. The hose moves freely through the pipe. With R 1/8" connection.	<input type="checkbox"/>
Pipe cleaning dirt blaster D 25 / 040	7	6.415-944.0		40	25 mm		The forward-tilted rotating pencil jet removes the most stubborn dirt. The three backwards-tilted jets ensure the necessary forward movement, as well as convenient handling.	<input type="checkbox"/>
Pipe cleaning dirt blaster D 30 / 040	8	6.415-946.0		40	30 mm			<input type="checkbox"/>
Pipe cleaning dirt blaster D 35 / 040	9	6.415-948.0		40	35 mm			<input type="checkbox"/>
Barrel and tank cleaning								
Barrel cleaner BC 14/12	10	2.641-740.0	120 bar				The BC 14/12 is an spray system for the efficient interior cleaning of containers and barrels, specially oak barrels with a volume of between 225 and 600 litres. One cleaning cycle is completed within 36 seconds and every spot in the container is covered by a water jet. After cleaning is finished the BC 14/12 can easily and conveniently take up the dirty water. The transformer included with the BC 14/12 makes it possible to use it worldwide (110 - 240 V, 50 - 60 Hz). The nozzle kits included make possible use with high-pressure cleaners with a water volume of 600 to 1400 l / h. Electrical components are protected in accordance with IP 55.	<input type="checkbox"/>

■ Included in delivery. □ Available accessories. ▲ Extension hose.

Accessories for HD 6/15 CX Plus 1.150-650.0



		Order no.	Flow rate			Price	Description	
Inno Foam Kit								
Inno Foam Set with detergent injector	1	2.640-151.0					High-pressure foam system with double lance (foam nozzle and high-pressure jet for rinsing). For use with mobile and stationary high-pressure and HDS pressure cleaners for cleaning or disinfection.	<input type="checkbox"/>
Easy Foam Set								
Easy Foam Set with RM injector	2	2.640-691.0					HP foam system for use with HD/HDS units for cleaning and disinfecting. Foam nozzle for connection to lance and HP chemical injector with precision 0-5% metering valve. The machine specific nozzle kit has to be ordered separately.	<input type="checkbox"/>
Nozzle kits for Inno/Easy Foam Set								
Nozzle kit 055 for Inno / Easy Set 500-600 l/h	3	2.640-870.0	500-600 l/h				Optimal adaptation to different machine outputs for economic use.	<input type="checkbox"/>
Foam nozzle mounting kit								
Foam nozzle attachment kit	4	2.637-926.0					Foaming agent kit. The foam nozzle is ideal for use in sanitary areas and the food industry and wherever long application times are necessary.	<input type="checkbox"/>
Cup foam lance								
Cup foam lance	5	6.394-668.0	1200 l/h				Short, handy foam lance with adjustable spray angle with 1 litre detergent tank. Ideal for cleaning cars due to its compact design.	<input type="checkbox"/>
1-litre cleaning agent container for foam lance	6	6.414-954.0						<input type="checkbox"/>

■ Included in delivery. □ Available accessories. ▲ Extension hose.

Accessories for HD 6/15 CX Plus 1.150-650.0



		Order no.	Length				Price	Description	
Automatic, self-winding hose reels									
Automatic hose reel, coated	1	2.639-919.0	20 m					Automatic hose reel of durable plastic. Painted steel bracket. Suitable for 20 m high-pressure hose.	<input type="checkbox"/>
Powder-coated swivel holder	2	2.639-931.0						Swivel holder for automatic hose reel wall mounting. For maximum action radius and flexibility of high-pressure hose. Rotatable 120°. Galvanised steel.	<input type="checkbox"/>
Automatic hose reel, stainless steel, includes swivel holder	3	6.391-421.0	20 m					Automatic stainless steel hose reel. With swivel holder. Suitable for 20 m high-pressure hose.	<input type="checkbox"/>
Automatic hose reel, powder-coated steel / plastic	4	6.392-975.0	20 m					Automatic hose reel for 20 m high-pressure hose. The console is made from powder-coated steel, the drum is made from plastic.	<input type="checkbox"/>
Automatic stainless steel / synthetic material hose drum	5	6.392-965.0	20 m					Automatic hose reel for 20 m high-pressure hose. The console consists of stainless steel, the drum is made from plastic.	<input type="checkbox"/>
ABS automatic stainless steel hose drum	6	2.641-866.0	20 m					High-grade, automatic steel hose reel. Especially suitable for use in the food industry. The material and finish provide for a corrosion-resistant, watertight capsuled sprong drive. Connection for HP hoses with nipple.	<input type="checkbox"/>
ABS pivoting stainless steel wall bracket	7	2.641-867.0						Swivelling wall bracket made of high-grade steel (for 2.641-866). This makes maximum flexibility and convenience possible when working with the HP hose.	<input type="checkbox"/>

■ Included in delivery. □ Available accessories. ▲ Extension hose.

Accessories for HD 6/15 CX Plus 1.150-650.0

KÄRCHER



		Order no.	Length	Diameter		Price	Description	
Starting current limiter								
Starting current limiter	1	2.637-495.0					Reduces starting current in single-phase supply and protects line fuse.	<input type="checkbox"/>
Geka coupling								
Geka connector with hose barb, R 1/2"	2	6.388-461.0					with hose liner	<input type="checkbox"/>
Geka connector with hose barb, R 3/4"	3	6.388-455.0						<input type="checkbox"/>
Geka connector with inner thread, R 3/4"	4	6.388-473.0					with female thread	<input type="checkbox"/>
Suction filter								
Suction filter with check valve	5	4.730-012.0					Brass suction filter suitable for ponds, storage tanks, etc. With check valve.	<input type="checkbox"/>
Water suction filter	6	6.414-956.0						<input type="checkbox"/>
Water fine filter								
Water fine filter, with adapter	7	4.730-102.0					Fine-mesh water filter, 125 µm, max. temperature 50°C. Protects the high-pressure cleaner from dirt particles contained in the water. Water flow rate up to 1200 l/h. Connection 3/4", with adapter, 1".	<input type="checkbox"/>
Water supply hose								
Water supply hose	8	4.440-038.0	7.5 m				NW 13 R1" / R 3/4", up to 30 °C	<input type="checkbox"/>
	9	4.440-207.0	7.5 m				NW 19 R1" / R 3/4", up to 85 °C, for pick-up	<input type="checkbox"/>
Backflow check valve								
Backflow preventer	10	2.641-374.0					To prevent detergent getting into the drinking water cycle in case of inlet at low-pressure. - hot water resistant up to 80 °C - tested according to IEC 60335-2-79 - integrated leakage protection	<input type="checkbox"/>

■ Included in delivery. □ Available accessories. ▲ Extension hose.

Accessories for HD 6/15 CX Plus 1.150-650.0



		Order no.	Flow rate				Price	Description	
Rotating washing brush									
Rotating wash brush for < 800 l/h machines, natural hair bristles	1	4.762-560.0	500-800 l/h						<input type="checkbox"/>
Rotating wash brush for < 800 l/h machines, nylon bristles	2	4.762-561.0	500-800 l/h					The rotating wash brush gently removes fine dust and grime from all surfaces. Heat-resistant up to 80°C. (M 18 x 1.5, replaceable brush insert).	<input type="checkbox"/>
Push-on washing brush									
Push-on washing brush	3	4.762-016.0						Push-on wash brush for universal use. Simply push on to lance. Connector: M 18 x 1.6.	<input type="checkbox"/>
Push-on wash brush	4	4.762-497.0						The wash brush is fitted directly onto the devices' new dual and triple nozzles using clamping.	<input type="checkbox"/>

■ Included in delivery. □ Available accessories. ▲ Extension hose.