



HD 5/15 CX Plus

Practical, mobile, versatile: the HD 5/15 CX Plus cold water high-pressure cleaner for vertical and horizontal operation. With accessory storage, brass cylinder head and automatic pressure relief.





1 Save energy and time: EASY!Force high-pressure gun and EASY!Lock quick-release fasteners

- At last work without getting tired: the EASY!Force high-pressure gun.
- EASY!Lock quick-release fasteners: durable and robust. And five times faster than screws.

2 Mobility

- Integrated carrying handle on the front of the machine enables easy loading and convenient transport.
- Push handle can be retracted at the push of a button.

³ Flexibility


- Vertical and horizontal operation possible.
- The wheels are not on during horizontal operation. As such, the machine offers maximum stability.

4 Quality

- The automatic pressure relief protects the components and extends the service life of the machine.
- High-quality brass cylinder head.

TECHNICAL DATA AND EQUIPMENT

KARCHER

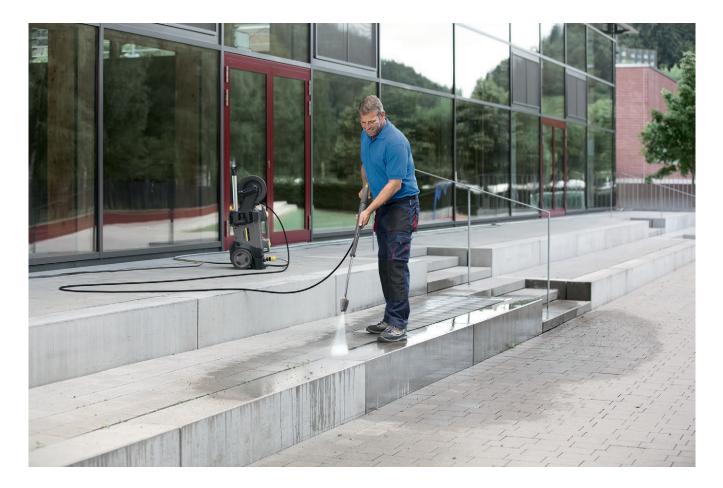

HD 5/15 CX Plus

Automatic pressure relief

- For horizontal and vertical operation
- Save energy and time: EASY!Force high-pressure gun and
 - EASY!Lock quick-release fasteners

| Technical data | | |
|--|-------------|--|
| Order No. | | 1.520-932.0 |
| EAN code | | 4054278164601 |
| Supply voltage | Ph / V / Hz | 1 / 230 / 50 |
| Flow rate | l/h | 500 |
| Working pressure | bar / MPa | 150 / 15 |
| Max. pressure | bar / MPa | 200 / 20 |
| Max. inlet temperature | °C | bis zu 60 |
| Connection load | kW | 2.8 |
| Weight | kg | 27.5 |
| Dimensions (L × W × H) | mm | 380 × 370 × 930 |
| | | |
| | | |
| Equipment | | |
| Equipment Spray gun | | EASY!Force |
| | m | EASY!Force 15 / DN 6, 250 bar |
| Spray gun | m mm | |
| Spray gun High-pressure hose | | 15 / DN 6, 250 bar |
| Spray gun High-pressure hose Spray lance | | 15 / DN 6, 250 bar 840 |
| Spray gun High-pressure hose Spray lance Triple nozzle (0°/25°/40°) | | 15 / DN 6, 250 bar 840 Manual |
| Spray gun High-pressure hose Spray lance Triple nozzle (0°/25°/40°) Dirt blaster | | 15 / DN 6, 250 bar 840 Manual |
| Spray gun High-pressure hose Spray lance Triple nozzle (0°/25°/40°) Dirt blaster Integrated pressure hose reel | | 15 / DN 6, 250 bar 840 Manual |
| Spray gun High-pressure hose Spray lance Triple nozzle (0°/25°/40°) Dirt blaster Integrated pressure hose reel Anti-twist system | | 15 / DN 6, 250 bar 840 Manual - |

KARCHER





| | | | | | | | | - |
|--|----|-------------|-------|--------------|----------|-------|---|-----|
| | | | | | | | | |
| | | | | | | | | |
| | | | | | | | | |
| | | | | Max. working | | | | |
| | | Order No. | ID | pressure | Length | Price | Description | |
| Standard with unions on both sides | | | | | <u> </u> | | | |
| High-pressure hose 2x EASY!Lock, | 1 | 6.110-031.0 | ID 8 | 315 bar | 10 m | | High-pressure hose (ID 8) suitable for up to 315 bar pres- | |
| ID 8, 315 bar, 10 m, ANTI!Twist | | | | | | | sure. High-pressure hose with innovative EASY!Lock hand | |
| | | | | | | | screw connection at both ends, ANTI!Twist, 10 m long. | + |
| High-pressure hose 2x EASY!Lock, | 2 | 6.110-030.0 | ID 8 | 315 bar | 15 m | | 15 m long high-pressure hose, ID 8, with ANTI!Twist at both | Ι, |
| ID 8, 315 bar, 15 m, ANTI!Twist High-pressure hose 2x EASY!Lock | 3 | 6.110-032.0 | ID 8 | 315 bar | 20 m | | ends with time-saving EASY!Lock hand screw connection. High-pressure hose (ID 8), 20 m long, with time-saving and | + |
| ID 8, 315 bar, 20 m, ANTI!Twist | 2 | 0.110 052.0 | 100 | 515 001 | 20111 | | robust EASY!Lock hand screw connection at both ends. For | |
| | | | | | | | up to 315 bar pressure. | 1 |
| High-pressure hose 2x EASY!Lock, | 4 | 6.110-014.0 | ID 8 | 315 bar | 30 m | | Convenient length (30 m) and innovative EASY!Lock hand | |
| ID 8, 315 bar, 30 m, ANTI!Twist | | | | | | | screw connection: high-pressure hose (ID 8) with ANTI!Twis | t i |
| | | | | | | | for up to 315 bar pressure. | _ |
| High-pressure hose 2x EASY!Lock, | 5 | 6.110-042.0 | ID 10 | 220 bar | 15 m | | With innovative EASY!Lock hand screw connection for up to | |
| ID 10, 220 bar, 15 m | | 6 110 042 0 | ID 10 | 220 har | 20 m | | 220 bar pressure: 15 m long high-pressure hose (ID 10). | + |
| High-pressure hose 2x EASY!Lock, ID 10, 220 bar, 20 m | 6 | 6.110-043.0 | ID 10 | 220 bar | 20 m | | Main features of this high-pressure hose (ID 10): 20 m long with extremely time-saving and convenient EASY!Lock hand | |
| 10 10, 220 081, 20 11 | | | | | | | screw connection at both ends. | 1 |
| High-pressure hose 2x EASY!Lock, | 7 | 6.110-044.0 | ID 10 | 220 bar | 25 m | | Impressive values and basic equipment: high-pressure hose | t |
| ID 10, 220 bar, 25 m | | | | | | | (ID 10), 25 m long, for up to 220 bar pressure. | ' |
| High-pressure hose 2x EASY!Lock, | 8 | 6.110-045.0 | ID 10 | 220 bar | 40 m | | 40 m long high-pressure hose with EASY!Lock system for | Τ |
| ID 10, 220 bar, 40 m | | | | | | | time-saving hand screw connection (at both ends). (ID) 10, | |
| | | | | | | | up to 220 bar working pressure. | + |
| High-pressure hose 2x EASY!Lock, | 9 | 6.110-059.0 | ID 12 | 250 bar | 15 m | | Suitable for up to 250 bar working pressure: high-pressure | |
| ID 12, 250 bar, 15 m | | | | | | | hose (ID 12), 15 m long, with convenient EASY!Lock hand screw connection at both ends. | |
| High-pressure hose 2x EASY!Lock | 10 | 6.110-060.0 | ID 12 | 250 bar | 40 m | | With EASY!Lock hand screw connection, 40 m long for wide | + |
| 2x EASY!Lock ID 12, 250 bar, 40 m | | | | | | | working radius: high-pressure hose (ID 12) with EASY!Lock | |
| | | | | | | | hand screw connection at both ends. Suitable for up to 250 | |
| | | | | | | | bar working pressure. | |
| Longlife 400 with unions on both si | | | 1 | | | | | |
| High-pressure hose Longlife 400 | 11 | 6.110-023.0 | ID 8 | 400 bar | 30 m | | Durable high-pressure hose with double steel reinforcemen | |
| 2x EASY!Lock, ID 8, 400 bar, 30 m, ANTI!Twist | | | | | | | ANTI!Twist and EASY!Lock hand screw connection at both ends. ID 8, 30 m long, for up to 400 bar pressure. | 4 |
| High-pressure hose Longlife 400 | 12 | 6.110-027.0 | ID 8 | 400 bar | 20 m | | High-pressure hose with ANTI!Twist, EASY!Lock hand screw | + |
| 2x EASY!Lock, ID 8, 400 bar, 20 m, | 12 | 0.110 027.0 | 100 | 400 bai | 20111 | | connections and double steel reinforcement. 20 m long, ID 8 | |
| ANTI!Twist | | | | | | | EASY!Lock hand screw connection at both ends. | |
| High-pressure hose Longlife 400 | 13 | 6.110-029.0 | ID 8 | 400 bar | 15 m | | The double steel reinforcement ensures a long lifetime of | T |
| 2x EASY!Lock, ID 8, 400 bar, 15 m, | | | | | | | this 15 m long high-pressure hose (ID 8), approved for up to |) |
| ANTI!Twist | | | | | | | 400 bar pressure hose. | |
| Standard | | | | 1 | 1 1 | 1 | | |
| High-pressure hose AVS hose reel | 14 | 6.110-036.0 | ID 6 | 250 bar | 15 m | | With AVS hose reel connection and high-pressure hose (ID 6 | |
| connection, ID 6, 250 bar, 15 m | | | | | | | 15 m long, up to 250 bar pressure) with EASY!Lock hand screw connection. | 1 |
| High-pressure hose AVS hose reel | 15 | 6.110-026.0 | ID 6 | 300 bar | 15 m | | For up to 300 bar working pressure: 15 m long high-pres- | + |
| connection, ID 6, 300 bar, 15 m | 15 | 0.110 020.0 | | 500 001 | 1.2 | | sure hose (ID 6) with AVS connection for hose reels and | |
| | | | | | | | EASY!Lock hand screw connection. | |
| High-pressure hose AVS hose reel | 16 | 6.110-033.0 | ID 8 | 315 bar | 15 m | | High-pressure hose with rotatable ANTI!Twist AVS hose ree | Ť |
| connection, ID 8, 315 bar, 15 m, | | | | | | | connection and EASY!Lock hand screw connection. Maximur | n I |
| ANTI!Twist | | | | | | | working pressure 315 bar, 15 m long, ID 6. | |

KARCHER





10




















| | | | | | Diame- | | | |
|---|----|-------------|-------------|-------------|--------|-------|---|--|
| | | Order No. | Flow rate | Nozzle size | ter | Price | Description | |
| FR Classic surface cleaner | | | I | | | 1 | | |
| FR Classic surface cleaner | 1 | 2.111-016.0 | | | 300 mm | | The ideal entry-level model in the Kärcher surface cleaner range for cleaning surfaces indoors and outdoors. With splash guard and up to 150 bar working pressure. | |
| Hard Surface Cleaner FRV 30 | | | | | | | | |
| Rubber lip for FRV 30 | 2 | 2.642-910.0 | | | | | For smooth floors indoors. The squeegee increases the suction performance of the FRV 30 and minimises the amount of water remaining. This means the floor is dry in just a few minutes. | |
| Extension hose 5 m | 3 | 4.440-939.0 | | | | | 5m extension hose for FRV 30. Connection sleeve included. | |
| Hose fastening attachment kit | 4 | 2.642-528.0 | | | | | | |
| Dirt trap attachment kit | 5 | 2.642-532.0 | | | | | | |
| FRV 30 surface cleaner | 6 | 2.111-010.0 | | | | | | |
| Hard surface cleaner FR 30 | | | | | | | | |
| FR 30 | 7 | 2.111-011.0 | | | 300 mm | | | |
| FR 30 Me surface cleaner | | | | | | | | |
| Hard Surface Cleaner FR 30 Me | 8 | 2.111-013.0 | | | 300 mm | | Hot water resistant stainless steel surface cleaner with double ceramic bearings, non-marking swivel castors and suction hose connection. Ideal for indoor cleaning, e.g. food industry. | |
| Machine-specific nozzle kits for FR | | | | | | | | |
| Nozzle kit for surface cleaners | 9 | 2.640-482.0 | 450-500 l/h | | | | Nozzle kit includes power nozzles and unions. For Kärcher surface cleaners (450 to 500 l/h). | |
| Machine-specific nozzle kits for FR | | | | | | | | |
| Nozzle kit 035 - for FRV | 10 | 2.642-430.0 | | 35 | | | | |
| Machine-specific nozzle kits for FR | | | | | | | | |
| Nozzle kit for FR Classic 034 | 11 | 2.885-313.0 | | 34 | | | Nozzle kit specifically for FR Classic surface cleaner. | |
| FRV 30 Me surface cleaner | | | | | | | | |
| Extension hose FRV 30 Me and FRV 50 Me | 12 | 4.441-040.0 | | | | | | |
| Surface Cleaner FRV 30 Me | 13 | 2.111-012.0 | | | | | | |
| Surface Cleaner FR 50 Me | | | | | | | | |
| Surface Cleaner FRV 50 ME | 14 | 2.111-024.0 | | | | | | |

 Surface Cleaner FRV 50 ME
 14
 2.111-024.0

 ■ Included in delivery.
 □ Available accessories.
 ▲ Extension hose.



| | | Order No. | Flow rate | | Price | Description |
|---------------------|---|-------------|-----------|-------|-------|---|
| Trigger guns | | | | I | I | |
| EASY!Force Advanced | 1 | 4.118-005.0 | | | | Effortless, not energy-sapping: the EASY!Force high-pres- sure gun uses the recoil force of the high-pressure jet to reduce the holding force for the operator to zero. |
| Quick connect | | | | | | |
| Quick coupling | 2 | 2.115-000.0 | | | | For fast changes between different spray lances/accessories. Perfect for Kärcher spray unit, suitable for trigger gun/spray lance interface. With M 22 x 1.5 internal thread. |
| Male coupling | 3 | 2.115-001.0 | | | | Hardened stainless steel male coupling for quick coupling 6.401-458. With M 22 x 1.5 external thread. |



| | | Order No. | Max. working pressure | Nozzle size | | Price | Description |
|---------------------------------|---|-------------|--------------------------|-------------|--|-------|---|
| Triple nozzles | | | | | | | |
| Triple nozzle 032 | 1 | 4.117-027.0 | 300 bar | 32 | | | Triple nozzle with manual nozzle changeover. Convenient spray adjustment. For machines with an injector, the low-pressure flat stream is useful for cleaning agent suction and application. Connection M 18 x 1.5. |
| Dirt Blaster, small | | | | | | | |
| Dirt blaster - more Performance | 2 | 4.114-019.0 | 180 bar | 35 | | | The new performance dirt blaster (nozzle size 035) with rotating point jet makes a big difference: up to 50% higher cleaning and area performance than its predecessor. |
| Dirt blaster, large | | | | | | | |
| Dirt blaster | 3 | 4.114-040.0 | 300 bar | 35 | | | The dirt blaster with rotating pencil jet offers 10 times better cleaning performance. Ceramic nozzle and bearing ring for a long service life. Further data: Max. 300 bar, 30 MPa, 85°C. |

 \blacksquare Included in delivery. $\hfill\square$ Available accessories. $\hfill \blacktriangle$ Extension hose.

| 1,5 | 2 | 3 | 4 | 6 | 7 | 8 |
|-----|----|--------------|----|----|----|----|
| 9 | 10 | 11 | 12 | 13 | 14 | 15 |
| | | Max modiling | | | | |

| | | Order No. | Max. working pressure | Length | | Price | Description | |
|--|----------|----------------|-----------------------|---------|----|-------|--|----------------|
| Rotating spray lances | | | | | 11 | - | | |
| 850 mm spray pipe, rotatable | 1 | 4.112-006.0 | 300 bar | 840 mm | | | 850 mm stainless steel lance (manual coupling) with ergo- nomic handle for ease of use and protection. Rotatable 360 under pressure. | , |
| Spray lance, 200 mm, rotatable | 2 | 4.112-027.0 | 300 bar | 250 mm | | | 600 mm stainless steel lance (manual coupling) with ergo- | |
| Spray lance, 400 mm, rotatable | 3 | 4.112-024.0 | 300 bar | 400 mm | | | nomic handle for ease of use and protection. Rotatable 360 | |
| 600 mm spray pipe, rotatable | 4 | 4.112-007.0 | 300 bar | 600 mm | | | under pressure. | |
| 1050 mm spray pipe, rotatable | 5 | 4.112-000.0 | 300 bar | 1050 mm | | | 1050 mm stainless steel lance (manual coupling) with ergo- nomic handle for ease of use and protection. Rotatable 360 under pressure. | · 🗆 |
| 1550 mm spray pipe, rotatable | 6 | 4.112-018.0 | 300 bar | 1550 mm | | | 1550 mm stainless steel lance (manual coupling) with ergo- nomic handle for ease of use and protection. Rotatable 360 under pressure. | |
| 2050 mm spray pipe, rotatable | 7 | 4.112-021.0 | 300 bar | 2050 mm | | | 2050 mm stainless steel lance (manual coupling) with ergo- nomic handle for ease of use and protection. Rotatable 360 under pressure. | [,] 🗆 |
| Double lance | | | | | | | | |
| Double lance 960 mm | 8 | 6.394-665.0 | 310 bar | 960 mm | | | 960 mm double lance for variable pressure adjustment on handle at full water flow rate. Suitable for agricultural use (e.g. stable cleaning). | |
| Angular spray lance | | | | | | | | |
| Spray lance for toilets and rain gutters | 9 | 4.112-029.0 | | | | | Stainless steel lance WC and gutter with nozzle insert. Spe- cially shaped for effective and hygienic cleaning of gutters and toilets. | |
| Flexible spray lance | | | | | | | | |
| Flexible lance 1050 mm | 10 | 4.112-035.0 | 210 bar | 1050 mm | | | 1050 mm flexible lance with variable bend from 20° to 140°, ideal for cleaning difficult to reach areas, e.g. gutters. | |
| Telescopic spray lance | | 1 | 1 | 1 | | | 1 | |
| Telescopic spray lance | 11 | 4.112-037.0 | 225 bar | 5400 mm | | | Can be continuously extended from 1.8 to 5.4 m. For clean- ing areas that are difficult to reach, such as ceilings or fa- cades. With integrated HD trigger gun, M 22 x 1.5 connec- tion with rotary coupling. Connection for M 18 x 1.5 nozzle | |
| Strap for telescopic spray pipe | 12 | 6.373-987.0 | | | | | Convenient strap for relief when working with the telescop- ic spray lance (6.394-690). The burden is optimally distrib- uted on the body and longer periods of use are possible. | |
| Gutter cleaner | | | | | | | | |
| Gutter cleaning lance | 13 | 2.112-015.0 | | | | | The lance is suited for cleaning of gutter systems. Because of the shape of the lance and the special nozzle the gutter can be cleaned without removing the cover plates. | |
| Undercarriage spray lance | | | | | | | | |
| Underbody lance | 14 | 4.112-032.0 | | 700 mm | | | Stainless steel lance for effective and easy underbody and wheel arch cleaning. Without high-pressure nozzle. | |
| Additional handle | | | | | | | | |
| Additional handle for EASY!Lock spray lances | 15 | 4.321-380.0 | | | | | | |
| ■ Included in delivery. □ Av | /ailable | e accessories. | Extension h | ose. | | | | |



| | | | 1 | 1 | | | 1 | _ |
|-----------------------|-----------|----------------|---------------|------|------|-------|-------------|---|
| | | | | | | | | |
| | | | | | | | | |
| | | | | | | | | |
| | | | | | | | | |
| | | | | | | | | |
| | | | | | | | | |
| | | Order No. | | | | Price | Description | |
| Y distributor | | | | | | | · · · · · · | |
| Y distributor | 1 | 4.111-024.0 | | | | | | |
| Included in delivery. | Available | e accessories. | ▲ Extension h | ose. | | | | |

KARCHER

ACCESSORIES FOR HD 5/15 CX PLUS 1.520-932.0

| 2 | | | Ð | 5 | 6 | | | Ð | 8 | |
|--|--------|---------------|---|----|---|-------|--|---------------------------------|--|-----|
| 9 III |) | | Ð | 12 | 1 | 3 | | | 15 |) |
| | | Order No. | | | | Price | Description | | | |
| Nozzle union Protection part TR only for re- | 1 | 4.112-011.0 | | | | 1 | | | | |
| placement Coupling parts | | | | | | | | | | _ |
| Articulated joint | 2 | 6.987-705.0 | | | | | This articulated joint v an angle of 120°) is re areas. Fits directly on | commended f | or cleaning hard to rea | |
| Rotary coupling | | | | | | | | | | |
| Rotary coupling | 3 | 4.111-021.0 | | | | | Reliably prevents twis 1.5 m. Handle protecti | - | ses. Connection M 22 x | Х |
| Coupling | | | 1 | | | | | | | |
| Connector | 4 | 4.111-037.0 | | | | | For connecting and ex connection, brass with | - | | |
| Connector | | | 1 | | | | | | | |
| Screw sockets for surface cleaners and Servo Control controller | 5 | 4.111-022.0 | | | | | For attaching high-pre the HD trigger gun (wi M 18 x 1.5. | | | |
| Short spray unit | 6 | 4.111-038.0 | | | | | | | | _ |
| EASY!Lock adapter Adapter 1 M22 x 1.5 AG - | 7 | 4.111-029.0 | | | | | Adaptor for connection | | ses with EASY!Lock and | h |
| EASY!Lock 22 AG | | | | | | | pressure hoses with M | 22×1.5 conr | ection. | |
| Adapter 2 M22 x 1.5 IG - EASY!Lock 22 AG | 8 | 4.111-030.0 | | | | | Adaptor for connecting sure guns with M 22 × with EASY!Lock. | | | |
| Adapter 3 M22 x 1.5 IG - EASY!Lock 22 AG | 9 | 4.111-031.0 | | | | | Adaptor for connecting connection and spray with EASY!Lock. | | • | |
| Adapter 4 EASY!Lock 22 IG - AVS | 10 | 4.111-032.0 | | | | | Adaptor for connecting | | | - |
| Adapter 5 EASY!Lock 22 IG - M22 x 1.5 AG | 11 | 4.111-033.0 | | | | | connection and EASY! Adaptor for connecting spray lances with M 2 | g EASY!Force | high-pressure gun and | ł |
| Adapter 6 EASY!Lock 22 IG - M22 x 1.5 AG | 12 | 4.111-034.0 | | | | | Adaptor for connecting | g pressure ho Force high-pre | | !S- |
| Adapter 7 M18 x 1.5 IG - EASY!Lock 20 AG | 13 | 4.111-035.0 | | | | | | g spray lances | s with M 18 × 1.5 conne r wash brushes with | e |
| Adapter 8 EASY!Lock 20 IG - M18 x 1.5 AG | 14 | 4.111-036.0 | | | | | Adaptor for connecting brushes with M 18 × 1 EASY!Lock. | | | |
| Cleaning agent injector | | 1 | | | | | | | | |
| Cleaning agent injector for high and low pressure (without nozzles) | 15 | 4.637-032.0 | | | | | Detergent injector for dosage. Maximum dos | | | |
| Cleaning agent injector for high pressure (without nozzle) | 16 | 4.637-033.0 | | | | | Cleaning agent dosage | at high press | ure 3 - 5 % | |
| Machine-specific nozzle kit with or | der no | . 3.637-170.0 | | | | | | | | |
| Nozzle kit HD 500-700 l/h | 17 | 4.769-045.0 | | | | | For HD 500 - 700 l/h. nozzle + union | Consists of no | ozzle insert + HP power | er |
| Nozzle insert with order no. 3.637- | 001.0 | | | | | | | | | |
| Nozzle insert up to 1,100 l/h - high pressure | 18 | 4.769-003.0 | | | | | Nozzle insert for deter | | | |



| | | Order No. | | | Price | Description | |
|---|----|-------------|--|--|-------|--|--|
| Nozzle insert up to 1,100 l/h - low pressure | 19 | 4.769-001.0 | | | | For low pressure with machines up to 1.100 l/h | |



| | | Order No. | Nozzle size | | | Price | Description |
|---------------------------------------|---|-------------|-------------|--|---|-------|---|
| HP nozzle spray angle 0° | | | | | | | |
| High-pressure nozzle spray angle °0 | 1 | 2.113-001.0 | 40 | | | | High-pressure nozzle with powerful jet for extremely stub- born dirt. |
| Power nozzle spray angle 15° | | | | | | | |
| Power nozzle spray angle 15° | 2 | 2.113-042.0 | 34 | | | | |
| Power nozzle spray angle 25° | | | | | - | | |
| Power nozzle spray angle 25° | 3 | 2.113-000.0 | 34 | | | | Fan jet nozzle with 25° spray angle, suitable for large areas and removing stubborn dirt and stains. |
| Power nozzle spray angle 40° | | | | | | | |
| Power nozzle spray angle 40° | 4 | 2.113-003.0 | 40 | | | | Power nozzle with a 40° spray angle and fan jet, suitable for large areas and sensitive surfaces. $\hfill \Gamma$ |

 \blacksquare Included in delivery. $\hfill\square$ Available accessories. $\hfill\blacksquare$ Extension hose.



| | | Order No. | Nozzle size | | | Price | Description | |
|---|--------|-------------|-------------|---|------|-------|---|--|
| Wet blasting attachment (without n | ozzle) | | 1 | 1 | | | | |
| Wet blasting attachment with flow control (without nozzles) | 1 | 4.115-000.0 | | | | | Paint, rust and scale removal made easy: Kärcher wet blast- ing attachment with flow control for adding blasting abra- sive to the high-pressure jet. | |
| Wet blasting attachment without flow control (nozzles not included) | 2 | 4.115-006.0 | | | | | Paint, rust and scale removal made easy: Kärcher wet blast- ing attachment with flow control for adding blasting abra- sive to the high-pressure jet. Without flow control. | |
| Nozzle kits for wet jet unit | | | | | | | | |
| Nozzle kit for wet jet unit 035 | 3 | 2.638-526.0 | 35 | | | | Nozzle kit with wet blasting nozzle and nozzle insert (type specific). For optimal Kärcher wet blasting attachment per- formance. Only in combination with wet blasting attachment 4.762-010/-022. | |
| Boron carbide nozzle | | | | | | | | |
| Boron carbide nozzle, for ma- chines up to 1,000 l/h | 4 | 6.415-084.0 | 6 mm | | | | In addition to nozzle packs. Very wear-resistant nozzle with boron carbide chuck for continuous-duty operation. | |

 \blacksquare Included in delivery. $\hfill\square$ Available accessories. $\hfill\blacksquare$ Extension hose.



| | | Order No. | Max. working pressure | Nozzle size | Diame- ter | Price | Description | |
|---|----|-------------|--------------------------|-------------|---------------|-------|---|-----|
| Pipe cleaning hose, ID 6 | | | | | | | | |
| Hose assembly TR pipe cleaning DN6 14MPa | 1 | 6.110-048.0 | 140 bar | | | | 10 m flexible high-pressure hose (DN 6) for cleaning pipes (threaded connection for R 1/8 nozzle). | |
| Pipe cleaning hose, DN 6, 20 m, max. 120 bar | 2 | 6.110-049.0 | 140 bar | | | | The 20 m pipe cleaning hose is a highly flexible high pres- sure hose for pipe interior cleaning (threaded connection for nozzle R 1/8). | - |
| Pipe cleaning hose, DN 6, 30 m, max. 120 bar | 3 | 6.110-050.0 | 140 bar | | | | 30 m flexible high-pressure hose (DN 6) for cleaning pipes (threaded connection for R 1/8 nozzle). | |
| Pipe cleaning nozzle | | | | | | | | |
| Pipe cleaning dirt blaster D 25 / 040 | 4 | 6.415-944.0 | | 40 | 25 mm | | The forward-tilted rotating pencil jet removes the most stubborn dirt. The three backwards-tilted jets ensure the | |
| Pipe cleaning dirt blaster D 30 / 040 | 5 | 6.415-946.0 | | 40 | 30 mm | | necessary forward movement, as well as convenient han- dling. | |
| Pipe cleaning dirt blaster D 35 / 040 | 6 | 6.415-948.0 | | 40 | 35 mm | | | |
| Pipe cleaning nozzle | 7 | 5.763-015.0 | | 55 | 16 mm | | 16 mm pipe cleaning nozzle with internal thread. Various jet | t 🗆 |
| | 8 | 5.763-020.0 | | 65 | 16 mm | | directions for environmentally-friendly cleaning of blocked drains and pipes. | |
| | 9 | 5.763-017.0 | | 50 | 30 mm | | Pipe cleaning nozzle with inner thread. Different spray directions. The hose moves freely through the pipe. (R $1/8"$ connection, 3 x 30° backwards, diameter 30 mm.) | |
| Rotating pipe cleaning nozzle | 10 | 6.415-428.0 | | 50 | 16 mm | | Pipe cleaning nozzle with four rotating jets and inner thread. Different spray directions. The hose moves freely through the pipe. With R 1/8" connection. | |



| | | Order No. | Flow rate | | | | Price | Description |
|--|---|-------------|-------------|--|--|--|-------|--|
| Cup foam lance | | | | | | | | 1 |
| Packing complete for 6.394-969.0 | 1 | 2.112-018.0 | | | | | | Short, handy foam lance with adjustable spray angle with 1 litre detergent tank. Ideal for cleaning cars due to its com- pact design. |
| 1-litre cleaning agent container for foam lance | 2 | 6.414-954.0 | | | | | | |
| Inno Foam Kit | | | | | | | | |
| Inno Foam Set with detergent injector | 3 | 2.112-000.0 | | | | | | High-pressure foam system with double lance (foam nozzle and high-pressure jet for rinsing). For use with mobile and stationary high-pressure and HDS pressure cleaners for cleaning or disinfection. |
| Easy Foam Set | | | | | | | | |
| Easy Foam Set with RM injector | 4 | 2.112-010.0 | | | | | | HP foam system for use with. HD/HDS units for cleaning and disinfecting. Foam nozzle for connection to lance and HP chemical injector with precision 0-5% metering valve. The machine specific nozzle kit has to be ordered separately. |
| Nozzle kits for Inno/Easy Foam Set | | | | | | | | |
| Nozzle kit 055 for Inno / Easy Set 500-600 l/h | 5 | 2.111-009.0 | 500-600 l/h | | | | | Optimal adaptation to different machine outputs for eco- nomic use. |
| Foam nozzle mounting kit | | | | | | | | |
| Foam nozzle attachment kit | 6 | 2.112-013.0 | | | | | | Foaming agent kit. The foam nozzle is ideal for use in sani- tary areas and the food industry and wherever long applica- tion times are necessary. |

KARCHER



| | | Order No. | Length | | Price | Description | | | | | | | | |
|---|---|-------------|---------------|--|-------|--|--|--|--|--|--|--|--|--|
| Automatic, self-winding hose reels | | | | | | · · | | | | | | | | |
| Automatic hose reel, powder-coat- ed steel / plastic | 1 | 6.392-074.0 | 20 m | | | Automatic hose reel for 20 m high-pressure hose. The con- sole is made from powder-coated steel, the drum is made from plastic. | | | | | | | | |
| Automatic stainless steel / syn- thetic material hose drum | 2 | 6.392-083.0 | 20 m | | | Automatic hose reel for 20 m high-pressure hose. The con- sole consists of stainless steel, the drum is made from plas- tic. | | | | | | | | |
| Automatic hose reel, coated | 3 | 6.392-106.0 | 20 m | | | Automatic hose reel of durable plastic. Painted steel bracket. Suitable for 20 m high-pressure hose. | | | | | | | | |
| Add-on kit hose reel lacquered basaltgra | 4 | 6.392-105.0 | 20 m | | | | | | | | | | | |
| Automatic hose reel, stainless steel, includes swivel holder | 5 | 6.392-076.0 | 20 m | | | Automatic stainless steel hose reel. With swivel holder. Suitable for 20 m high-pressure hose. | | | | | | | | |
| ABS automatic stainless steel hose drum | 6 | 6.392-122.0 | 20 m | | | High-grade, automatic steel hose reel. Especially suitable for use in the food industry. The material and finish provide for a corrossion-resistant, watertight capsuled sprong drive. Connection for HP hoses with nipple. | | | | | | | | |
| Powder-coated swivel holder | 7 | 2.639-931.0 | | | | Swivel holder for automatic hose reel wall mounting. For maximum action radius and flexibility of high-pressure hose. Rotatable 120°. Galvanised steel. | | | | | | | | |
| Pivoting stainless steel wall brack- et attachment kit | 8 | 2.641-867.0 | A Extension h | | | Swivelling wall bracket made of high-grade steel (for 2.641- 866). This makes maximum flexibility and convenience possible when working with the HP hose. | | | | | | | | |

KÄRCHER



| | | Order No. | Length | Diameter | | Price | Description | |
|---|----|-------------|--------|----------|--|-------|--|--|
| Starting current limiter | | | | | | | | |
| Starting current limiter | 1 | 2.637-495.0 | | | | | Reduces starting current in single-phase supply and protects line fuse. | |
| Geka coupling | | | | | | | | |
| Geka connector with hose barb, R 1/2" | 2 | 6.388-461.0 | | | | | with hose liner | |
| Geka connector with hose barb, R 3/4" | 3 | 6.388-455.0 | | | | | | |
| Geka connector with hose barb, R 1" | 4 | 6.388-465.0 | | | | | | |
| Geka connector with inner thread, R 3/4" | 5 | 6.388-473.0 | | | | | with female thread | |
| Suction filter | | | | | | | · | |
| Water suction filter | 6 | 6.414-956.0 | | | | | | |
| Suction filter with check valve | 7 | 4.730-012.0 | | | | | Brass suction filter suitable for ponds, storage tanks, etc. With check valve. | |
| Water fine filter | | | | | | | | |
| Water fine filter, with adapter | 8 | 4.730-102.0 | | | | | Fine-mesh water filter, 125μ m, max. temperature 50°C. Protects the high-pressure cleaner from dirt particles con- tained in the water. Water flow rate up to 1200 l/h. Connec- tion 3/4", with adapter, 1". | |
| Water supply hose | | | | | | | | |
| Water supply hose | 9 | 4.440-038.0 | 7.5 m | | | | NW 13 R1" / R 3/4", up to 30 °C | |
| | 10 | 4.440-207.0 | 7.5 m | | | | NW 19 R1" / R 3/4", up to 85 °C, for pick-up | |
| Backflow check valve | | | | | | | | |
| Backflow preventer | 11 | 2.641-374.0 | | | | | To prevent detergent getting into the drinking water cycle in case of inlet at low-pressure hot water resistant up to 80 °C - tested according to IEC 60335-2-79 - integrated leakage protection | |

 \blacksquare Included in delivery. $\hfill\square$ Available accessories. $\hfill A$ Extension hose.



| | | Order No. | Flow rate | | Price | Description | |
|---|---|-------------|-------------|--|-------|--|---|
| Push-on washing brush | | | | | | | |
| Push-on wash brush | 1 | 4.762-497.0 | | | | The wash brush is fitted directly onto the devices' new dual and triple nozzles using clamping. | |
| | 2 | 4.113-001.0 | | | | For general-purpose cleaning of all surfaces. Clamps directly onto the spray lance. Connection M 18 x 1.5 | |
| Rotating washing brush | | | ÷ | | | | |
| Rotating wash brush for < 800 l/h machines, nylon bristles | 3 | 4.113-004.0 | 500-800 l/h | | | The rotating wash brush gently removes fine dust and traf- fic film from all surfaces. Temperature resistant up to 60° C. (M 18 x 1.5, replaceable brush insert). | _ |
| Rotating wash brush for < 800 l/h machines, natural bristles | 4 | 4.113-003.0 | 500-800 l/h | | | Driven by water stream. Gently removes fine dust and traffic film from any surface. Temperature resistant up to 60°C, M 18 x 1.5 (replaceable brush insert). | |